

DELTA WATER TECHNOLOGY®



*Delta*  
WATER SOFTENERS



# *Delta* ARENAL



- Non-electric operation
- 9 different orientations possible
- Easy to install
- High low rates
- Small salt and water consumption

100% GREEN







# Delta

WATER SOFTENERS

# ARENAL

## DIMENSIONS

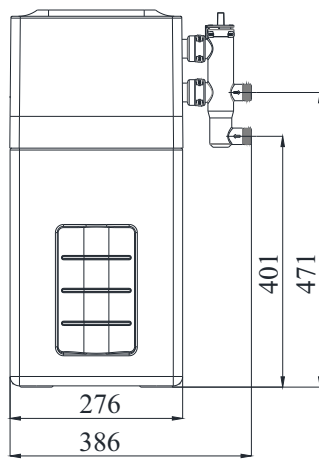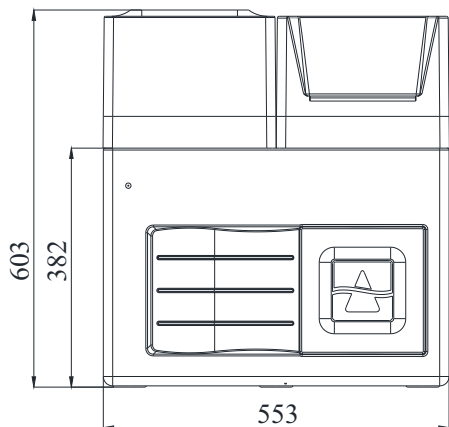

## TECHNICAL DATA

|                               |   |
|-------------------------------|---|
| Connection                    | 3/4" or 1"                                |
| Working Pressure              | 1 - 8 bar*                                |
| Flow Rate ( $\Delta p$ 1 bar) | 2.1 m <sup>3</sup> /h                     |
| Exchange Capacity             | 600 m <sup>3</sup> /ppm CaCO <sub>3</sub> |
| Water Usage / Regeneration    | 50 L                                      |
| Salt Usage / Regeneration     | 1.2 kg                                    |
| Regeneration Time             | 30 min                                    |
| Max. Temperature              | 40°C                                      |
| Volume of resin               | 12 L                                      |

\* for a correct regeneration, Delta Softeners require a minimum outlet pressure of 0.8 bar.

100% GREEN

Delta Water Engineering NV  
 Waesdonckstraat 1, 2640 Mortsels (Antwerp), BELGIUM  
 T +32 3 219 50 70  
 E [info@deltawatersystems.com](mailto:info@deltawatersystems.com) U [www.deltawatersystems.com](http://www.deltawatersystems.com)

