



Delta
WATER SOFTENERS



Delta ONEGA



- Non-electric operation
- 9 diferent orientations possible
- Easy to install
- High low rates
- Small salt and water consumption

**COMPLETELY
NEW DESIGN**

100% GREEN




Delta

WATER SOFTENERS

ONEGA

DIMENSIONS

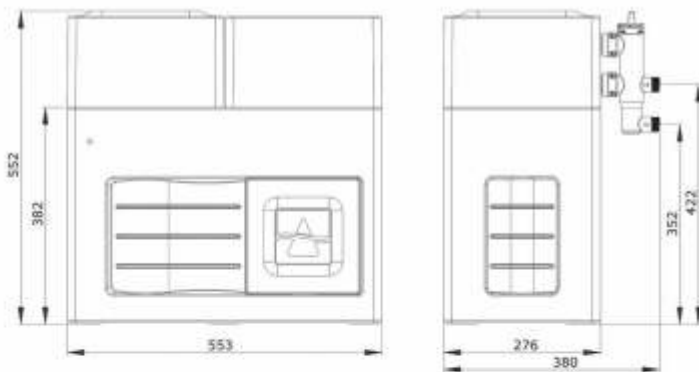

TECHNICAL DATA

Connection	3/4" , 1"
Volume of resin	9 L
Working Pressure	1 - 8 bar*
Flow Rate (Δp 1 bar)	2,0 m ³ /h
Exchange Capacity	400m ³ /ppm CaCO ₃
Water Usage / Regeneration	40 L
Salt Usage / Regeneration	0,9 kg
Regeneration Time	24 min
Max. Temperature	40°C

*for a correct regeneration, Delta Softeners require a minimum outlet pressure of 0.8 bar

100% GREEN

Delta Water Engineering NV

Waesdonckstraat 1, 2640 Mortsel (Antwerp), BELGIUM

T +32 3 219 50 70

E info@deltawatersystems.com U www.deltawatersystems.com

PWG
Min
POLLET WATER GROUP

