




Delta

WATER SOFTENERS

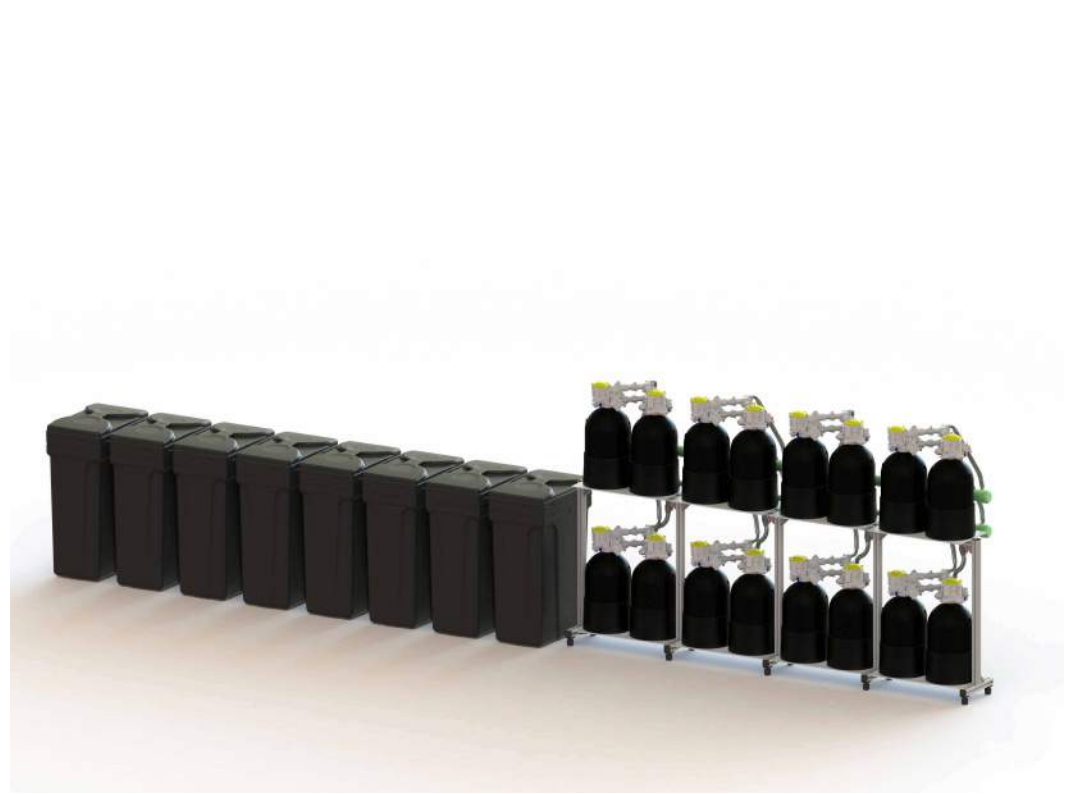


Ontario 16

100% GREEN



Delta

WATER SOFTENERS

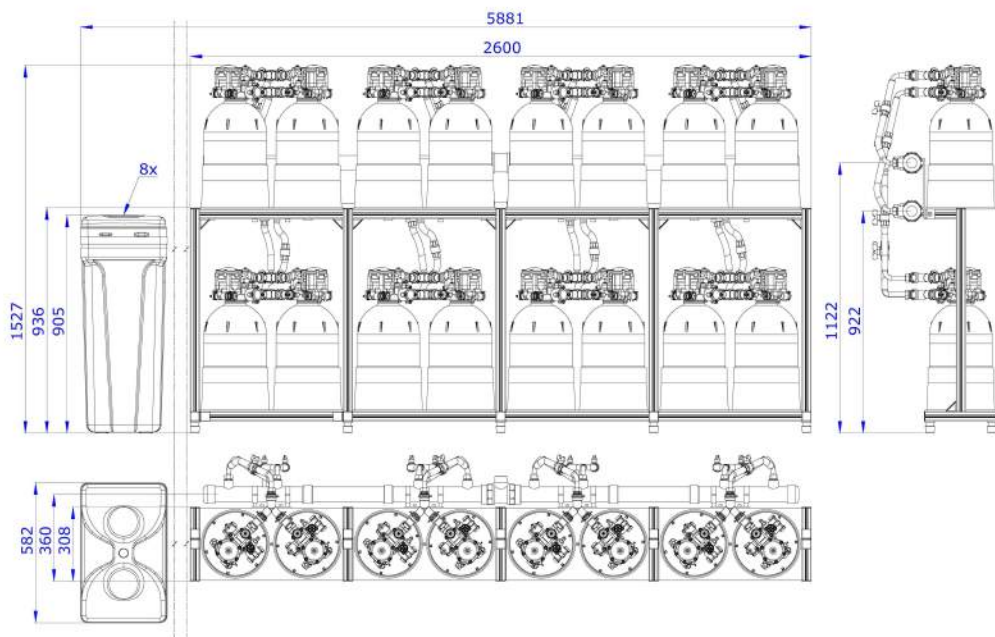

Technical Data

Resine Volume (liter)	192 (16 x 12)
Connection (inch)	3"
Working pressure(bar)	1-8* **
Peak flow rate (p. drop=1bar) (m ³ /h)	33.6
Nominal flow rate (p. drop=1bar) (m ³ /h)	26.9
Exchange capacity (m ³ /ppm CaCO ₃)	9600
Water usage / regeneration (liter)	800 (50 x 16)
Salt usage / regeneration (Kg)	19.2 (1.2 x 16)
Max. temperature (°C)	50
Max. water consumption (24h, 300ppm) (m ³)	64

* Minimum outlet pressure after the softener has to be 0.8bar or higher

** The total pressure on the complete system should never be higher than 6 bar

Ontario 16

100% GREEN