





# Delta

WATER SOFTENERS

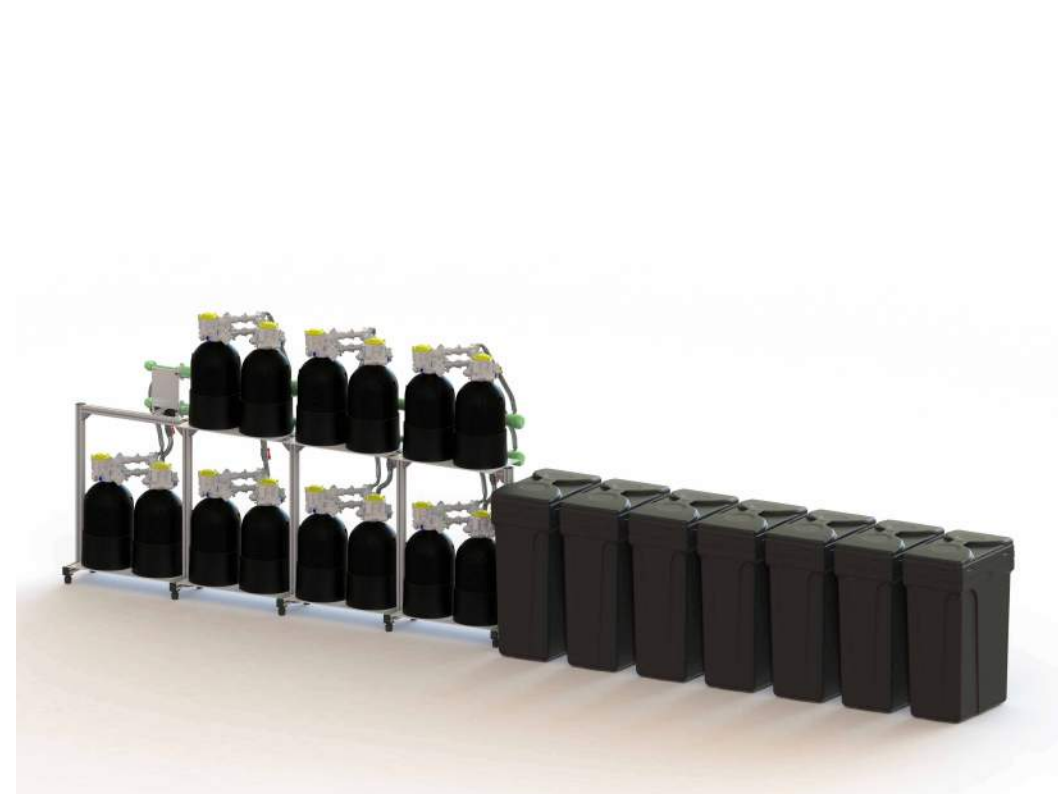

Ontario 14

100% GREEN

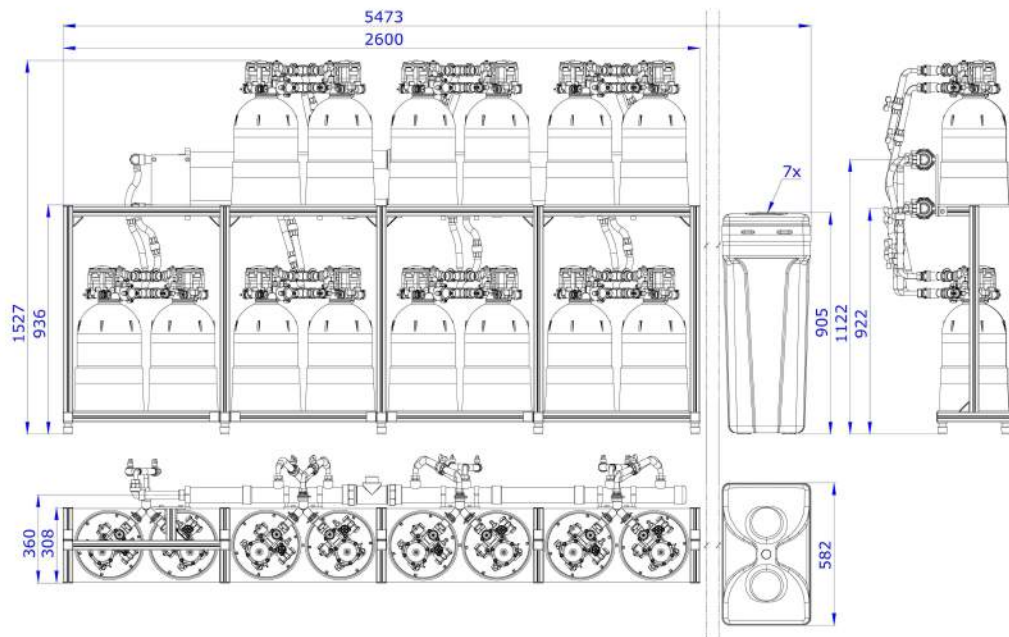

### Technical Data

Resine Volume (liter)	168 (14 x 12)
Connection (inch)	2"1/2
Working pressure(bar)	1-8* **
Peak flow rate (p. drop=1bar) (m <sup>3</sup> /h)	29.4
Nominal flow rate (p. drop=1bar) (m <sup>3</sup> /h)	23.5
Exchange capacity (m <sup>3</sup> /ppm CaCO <sub>3</sub> )	8400
Water usage / regeneration (liter)	700 (50 x 14)
Salt usage / regeneration (Kg)	16.8 (1.2 x 14)
Max. temperature (°C)	50
Max. water consumption (24h, 300ppm) (m <sup>3</sup> )	56

\* Minimum outlet pressure after the softener has to be 0.8bar or higher

\*\* The total pressure on the complete system should never be higher than 6 bar